


DUST STOP 4"

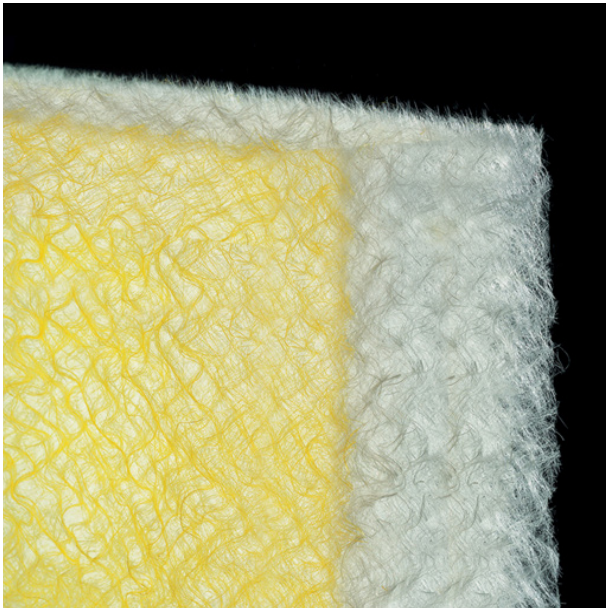

- ▶ 100% Glass fibers
- ▶ The high absorption capacity of the dry particles of pollen and dust
- ▶ High efficiency
- ▶ Low pressure drop
- ▶ Long life filter
- ▶ Low operating costs
- ▶ Fire resistant (Warr. BS 476/4)

G4
EN 779

UP TO
120°C

PCV

F1
DIN 53438

Class by ISO 16890: ISO Coarse 60%

Recommended filter end resistance: 200 Pa

Class by EN 779:2012: G4

Recommended filter end resistance: 250 Pa

Thickness: 110 mm

Average filtration efficiency (A_m): 91%

Airflow: 0,75-2,5 m/s


Initial resistance: 10-47 Pa

Material:

100% of elementary glass fibers progressively increasing density and laminated side air outlet. The fabric is impregnated with a special detergent, which increases the absorption capacity of the dry particles of pollen and dust. It has a very high retention capacity and storage of air pollution.

Application:

widely used in ventilation and air conditioning as the first stage of filtration.

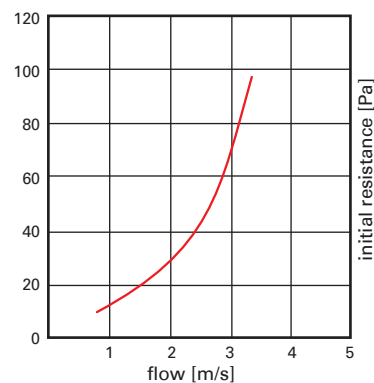

The values may vary slightly within tolerance.

We reserve the right to make changes in the technical specifications at any time without notice, as a result of continuous improvement of our products