


## ppi mats

## PPI 10

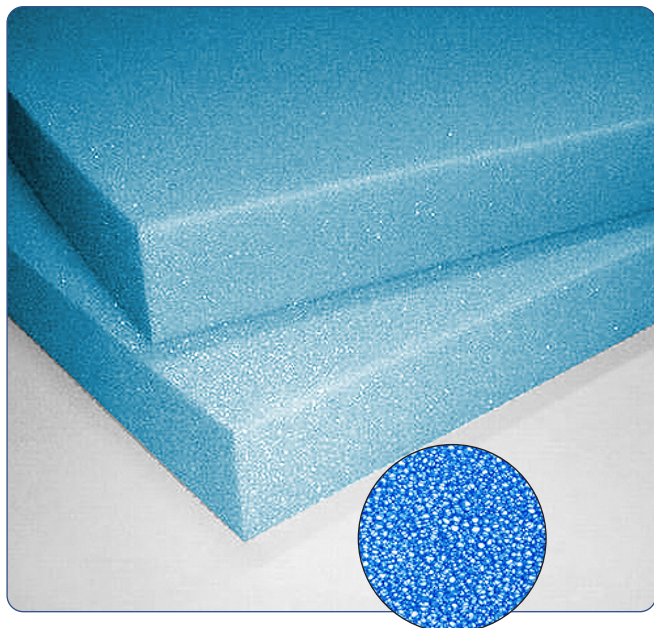

1. Filter foam - 100% polyurethane
2. High resistance to humidity
3. High resistance to heat
4. Long foam lifespan
5. Low operating costs

Type:	PU polyurethane foam
Thickness range:	4-500 mm
Density: 25 kg/m <sup>3</sup>	PN-EN-ISO 845
Tensile strength:	
min. 60 kPa	PN-EN-ISO 1798
Elongation at break:	
min. 60%	PN-EN-ISO 1798
Air flow rate:	very high
Thermal Resistance:	-40/+140°C
Colour:	blue
Sheets available:	1000x2000 mm or cut to size

**Filtration material:** it is produced with a pore volume of 10-45 PPI. It has 97% open pores.

It features high resistance to humidity and extremely high fluid collection capacity.

Washable.

**Application:** filter foam used in air filtration, aquariums, swimming pools.

**Storage:** the products should be stored in dry rooms (humidity up to 70%) at temperatures from +5°C to +30°C.