


filtering nonwovens

DUST STOP 2"

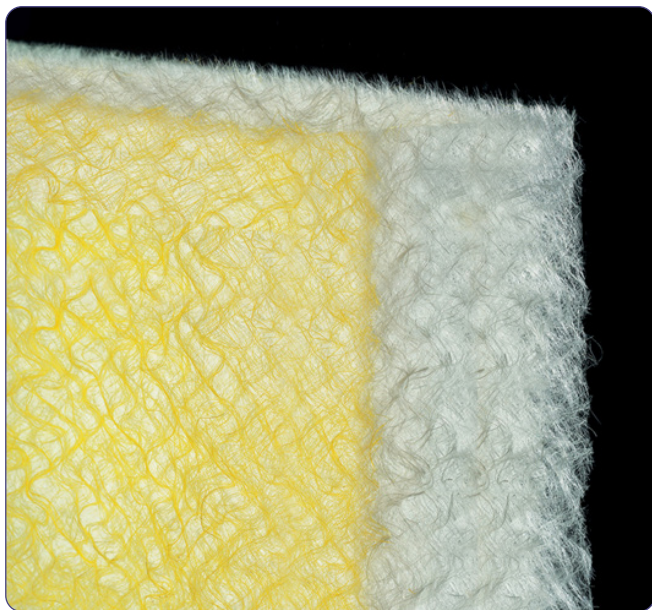

ISO 16890 Class: ISO Coarse 40%

*Final pressure drop derived from the filter test standard: 200 Pa

EN 779:2012 Class: G3

*Final pressure drop derived from the filter test standard: 250 Pa

Basis weight: 280 g/

Thickness: 60 mm

Average filtration efficiency(A_m): 89%

Air flow rate: 2,5 m/s

Initial pressure drop: 48 Pa

Temperature resistance: 120°C


Dust holding capacity: 422 g/

1. 100% glass fibers
2. High absorption capacity for dry pollen and dust particles
3. High efficiency
4. Low pressure drop
5. Long service life
6. Low operating costs
7. Flame retardant (Warr. BS 476/4)

26

Filtration material: 100% elemental glass fibers with progressively increasing density and laminated air outlet side. The nonwoven fabric is impregnated with a special agent, which increases its ability to absorb dry dust and pollen particles. It has a very to trap and store air pollutants.

Application: widely used in ventilation and air conditioning systems as the first stage of air filtration.

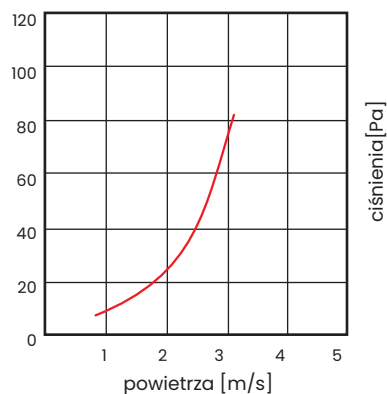

The values shown may vary slightly within tolerances.

* The final operating pressure drop of the filters should be checked in the technical documentation or consulted with the manufacturer of the equipment being operated.

* All technical parameters provided in this specification are for informational purposes only. Actual values may differ by up to $\pm 10\%$ from the stated figures. The manufacturer assumes no responsibility for any consequences arising from the selection of filters in non-standard sizes based solely on the user's own calculations.

We reserve the right to make changes to the technical specifications at any time without prior notice, resulting from the continuous improvement of our products.