


## ppi mats

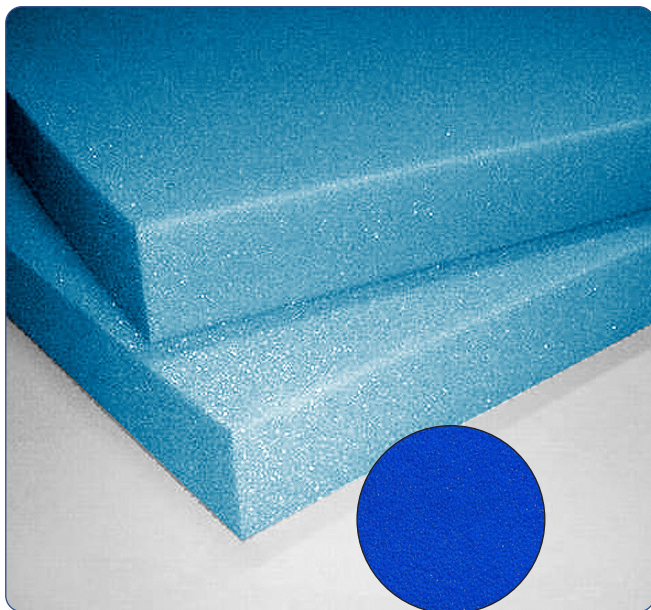

## PPI 30

Type:	PU polyurethane foam
Thickness range:	4-500 mm
Density: 25 kg/m <sup>3</sup>	PN-EN-ISO 845
Tensile strength:	
min. 75 kPa	PN-EN-ISO 1798
Elongation at break: 90%	PN-EN-ISO 1798
Tensile strength:	
6.0 - 9.0 [1/cm]	CAL I 127.29
Air flow rate:	very high
Thermal Resistance:	-40/+90°C
Colour:	blue
Sheets available:	1250x2000 mm or cut to size

**Filtration material:** it is produced with a of 10-45 PPI.

It has 97% open pores.

It features high resistance to humidity and extremely high liquid retention capacity

Washable.

**Application:** filter foam used in air filtration, aquariums, swimming pools.

**Storage:** the products should be stored in dry rooms (humidity up to 70%) at temperatures from +5°C to +30°C.

1. Filter foam - 100% polyurethane
2. High resistance to humidity
3. High resistance to heat
4. Long foam span
5. Low operating costs